



Use hook inside pocket of front spring shackle mount.
Make sure it is fully seated.

DO NOT
let chain contact shackle or spring.

DO NOT
strap on Tie Rod.

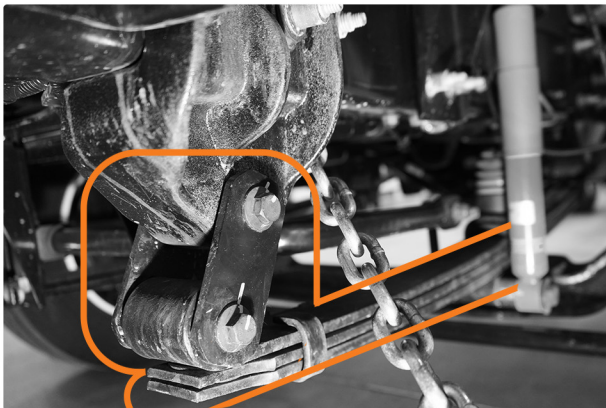


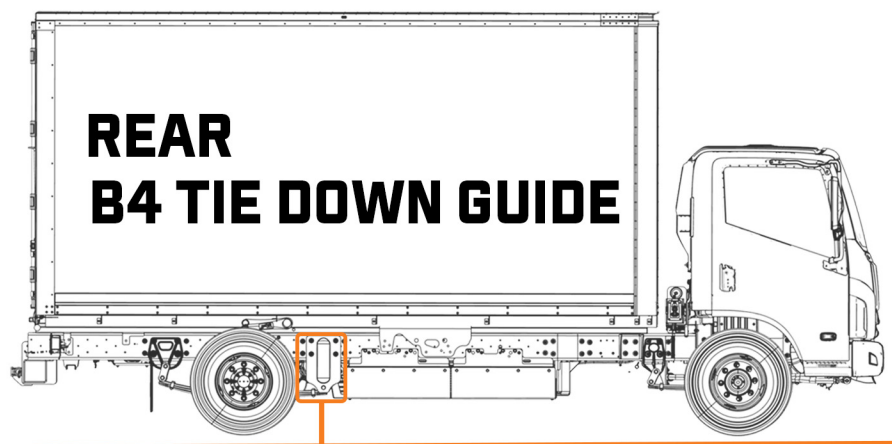

Ensure truck is in **Park** (P on Dash)

, park brake is pulled (PARK on dash), and truck does not roll after releasing foot brake

Use a strap inside pocket of Forward rear spring hanger

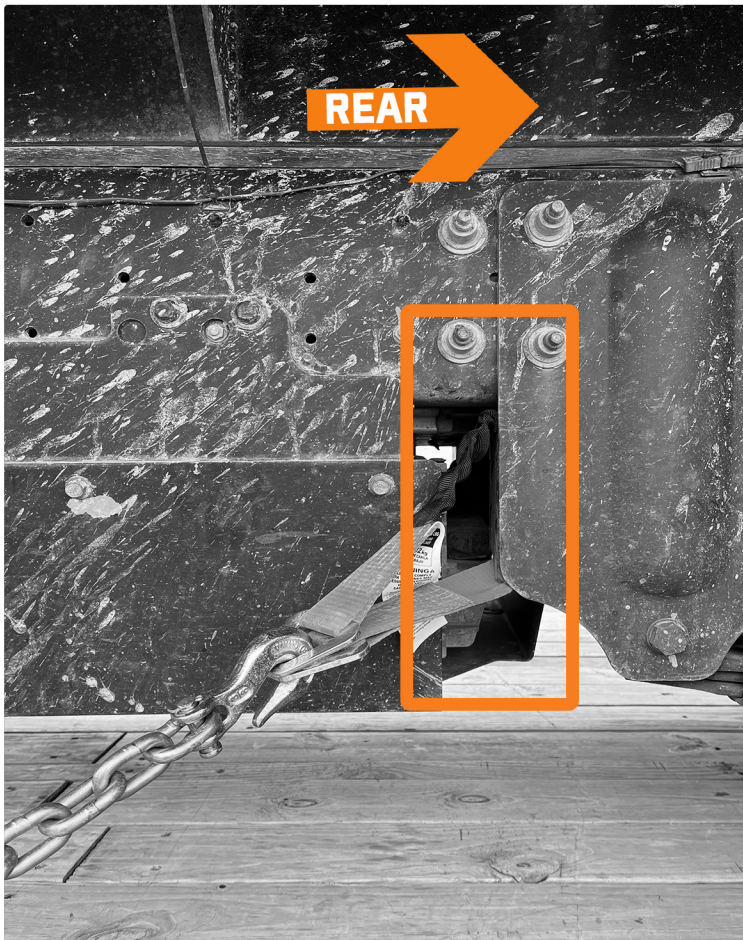

I hereby acknowledge the receipt of the Bollinger Motors Front and Rear Tie Down Guide and further acknowledge that I will adhere the procedures and instructions as indicated in the Guide as to the placement and security of the tie downs used during transport.

Date: _____

Name : _____ Signature : _____